

SFRG-12 Solvent Free Resin Coated Copper

Features & Benefits

- SFRG-12 (Solvent Free Resin Glass-Fiber Reinforced Coated Copper) is a kind of resin coated copper which provides the advantage of high thermal conductivity and reliability. This Semi-finished material is good for single and multilayer thermal conductive printed circuit board applications.
- SFRG-12 is a sandwich structure, which includes a layer of copper, prepreg, and lower release film
- Excellent thermal conductivity
- High Electrical Strength
- Lead-free solder compatible
- RoHS compliant and environmentally green
- Available in rolls
- TCLAD SFRG-12 minimizes thermal impedance and conducts heat more efficiently than standard FR-4 PCB printed wiring boards (PWB's) or IMS.
- The differentiating technology of Thermal Clad resides in the dielectric. This datasheet highlights the performance characteristics of TCLAD SFRG-12.


*Product thermal conductivity is based on 2oz cu x 100µm SFRG-12 x 1.5mm Al

Applications

- Traditional multilayer PCBs that have hot spots that need to be dissipated
- High power density applications which required low thermal resistance
- Power conversion, Inverter, DC/DC, AC/DC
- Industrial motor drives
- Solid State Relays


Configurations

Characteristics	SFRG-12
Panel Size [mm]	500 x 600 etc.
Prepreg Thickness [µm]	50,80,100,150 etc.
Circuit [oz]	1,2,3 etc.



We provide custom solutions for your applications. For Further questions, please contact your local sales agent or directly TCLAD sales in your region.

Test Thermal Performance of Insulated Metal Substrate (IMS®) TO-220 Set-up

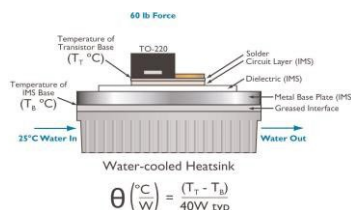

TCLAD

US sales.us@tclad.com
APAC sales.asia@tclad.com
Europe sales.eu@tclad.com
www.tclad.com



All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKET ABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before use, user shall determine the suitability of the product for its intended use, and the user assumes all risk and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE DIRECT, INCIDENTAL, OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE THE PRODUCT. No statement, purchase order or recommendation by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer. All marks used above are trademarks and/or registered trademarks of TCLAD Inc and its affiliates in the U.S., Germany and elsewhere. © 2021 TCLAD Inc. All rights reserved. US



Rev 2025 D96-001

Item	Thickness	Unit	Value (Typ.)	Method
Thermal Properties				
Product Thermal Conductivity		W/m-K	10 *	TO-220 Method
Dielectric Thermal Conductivity		W/m-K	2.8	ASTM D5470
Thermal Resistance	100µm (4mil)	°C/W	0.065	ASTM D5470
Thermal Impedance	100µm (4mil)	°C/W	0.085	TO-220 Method
Electrical Properties				
Dielectric Constant		-	3.8	IPC-TM-650 2.5.5.9
Dissipation Factor	100µm (4mil)	1MHz	0.006	IPC-TM-650 2.5.5.9
Capacitance	100µm (4mil)	pF	23.5	IPC-TM-650 2.5.5.9
Volume Resistivity		Ω-cm	10 ¹³	IPC-TM-650 2.5.17.1
Surface Resistivity		Ω/sq	10 ¹⁵	IPC-TM-650 2.5.17.1
Breakdown Voltage		AC KV/mm	>30	ASTM D149
Mechanical Properties				
Color		-	Off-White	Visual
Peel Strength @ 25°C		Kg/cm (lbf/in)	1.2 (6.7)	ASTM D286
Glass Transition (Tg)		°C	180	ASTM E1356
CTE in X,Y/Z Axis <Tg		µm/m°C	15	ASTM D3386
CTE in X,Y/Z Axis >Tg		µm/m°C	18	ASTM D3386
Youngs Modulus		GPa	18	ASTM D638
Decomposition Temperature (2% loss)		°C	370	IPC TM-650 2.4.24.6
Decomposition Temperature (5% loss) °C		°C	400	IPC TM-650 2.4.24.6
Chemical Properties				
Water Vapor Retention		%	< 0.5	ASTM E595
Out-Gassing Total Mass Loss		%	< 0.1	ASTM E595
Collect Volatile Condensable Material		%	< 0.1	ASTM E595
Agency Ratings & Durability- UL: E121882				
UL Flammability		-	V-0	UL 94